



UCECH 200  
UCECH 200

## STEEL BEARING INSERT



### BEARINGS INSERT

**Steel UC**

**Steel Eccentric UG**

**Steel UK**

**Special heat-treatment on  
bearing inner ring**

**Unique device to prevent  
bearing outer ring rotation**

### MATERIAL

**Efficient sealing**

**The self-contained bearing is  
double sealed with a combination  
of heat-resistant oil-proof  
synthetic rubber seal and steel  
slinger**

### TECHNICAL DATA

**Rational self-alignment**

**Larger load carrying capacity**

**Quiet operation**

**Longer service life**

**ANB Bearing Units with cast  
iron and rubber housings are  
all relubricable type equipped  
with grease fittings to secure  
full performance and longer  
service life of the units under  
any operating condition**

**Solid housing**

**The cast iron housing is of solid  
one-piece construction to  
provide maximum rigidity  
against deformation at  
mounting and wear resistance  
for any operating condition.**


**Easy and positive locking to  
shaft.**

**Complete interchangeability  
between bearing and housing.**

**Easy installation**

**The self-contained bearing is  
prelubricated with an adequate  
quantity of high quality grease**

## CAST IRON HANGER

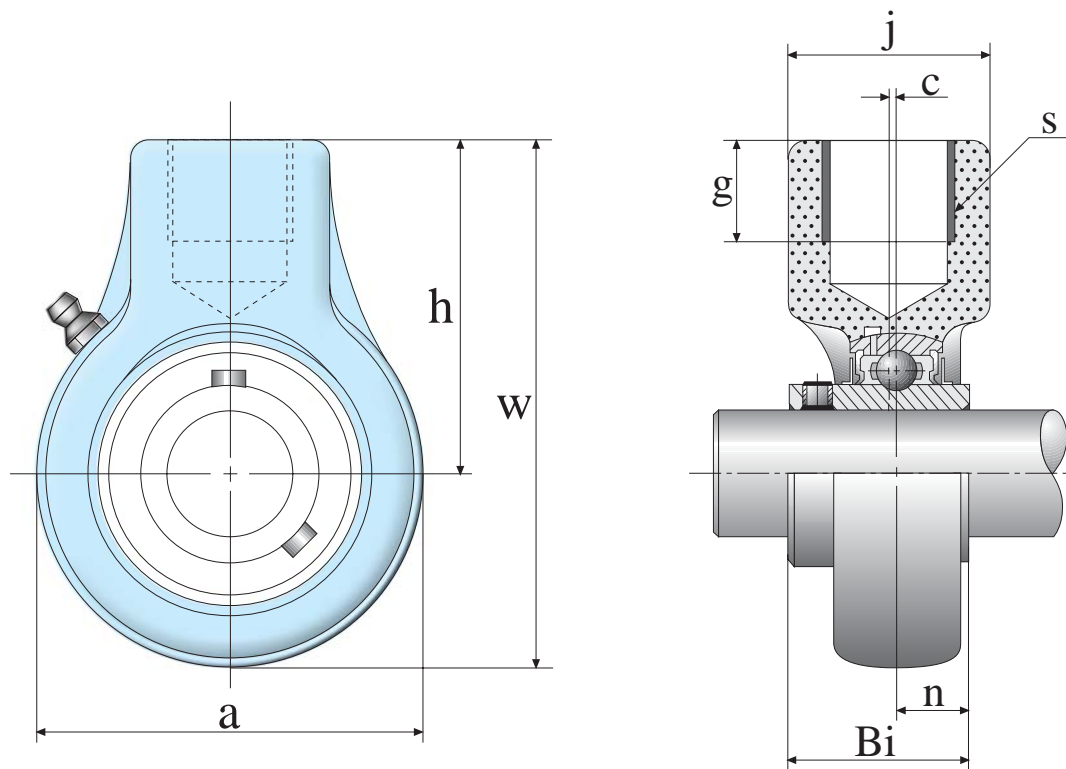

UNIT NUMBER	SHAFT DIAM.	DIMENSIONS (mm)									WEIGHT (kg)	BEARING NUMBER	HOUSING NUMBER
	mm	a	w	h	j	s	g	Bi	n	c			
UCECH205	25	70	99	64	40	PF $\frac{3}{4}$	19	34.1	14.3	0	0.74	UC205	ECH205
UCECH206	30	80	104	64	40	PF $\frac{3}{4}$	19	38.1	15.9	0	0.91	UC206	ECH206
UCECH207	35	92	116	70	40	PF $\frac{3}{4}$	19	42.9	17.5	0	1.2	UC207	ECH207
UCECH208	40	96	121	73	40	PF $\frac{3}{4}$	19	49.2	19	2	1.4	UC208	ECH208
UCECH209	45	108	136	82	48	PF 1	21	49.2	19	4	1.8	UC209	ECH209
UCECH210	50	114	140	83	48	PF 1	21	51.6	19	5	1.9	UC210	ECH210