



BEARINGS INSERT

Steel UC

Steel Eccentric UG

Steel UK

Special heat-treatment on bearing inner ring

Unique device to prevent bearing outer ring rotation

MATERIAL

Efficient sealing

The self-contained bearing is double sealed with a combination of heat-resistant oil-proof synthetic rubber seal and steel slinger

TECHNICAL DATA

Rational self-alignment

Larger load carrying capacity

Quiet operation

Longer service life

ANB Bearing Units with cast iron and rubber housings are all relubricable type equipped with grease fittings to secure full performance and longer service life of the units under any operating condition

Solid housing

The cast iron housing is of solid one-piece construction to provide maximum rigidity against deformation at mounting and wear resistance for any operating condition.

Easy and positive locking to shaft.

Complete interchangeability between bearing and housing.


Easy installation

The self-contained bearing is prelubricated with an adequate quantity of high quality grease.

CAST IRON 2-BOLT FLANGE

UCFL 200

STEEL BEARING INSERT

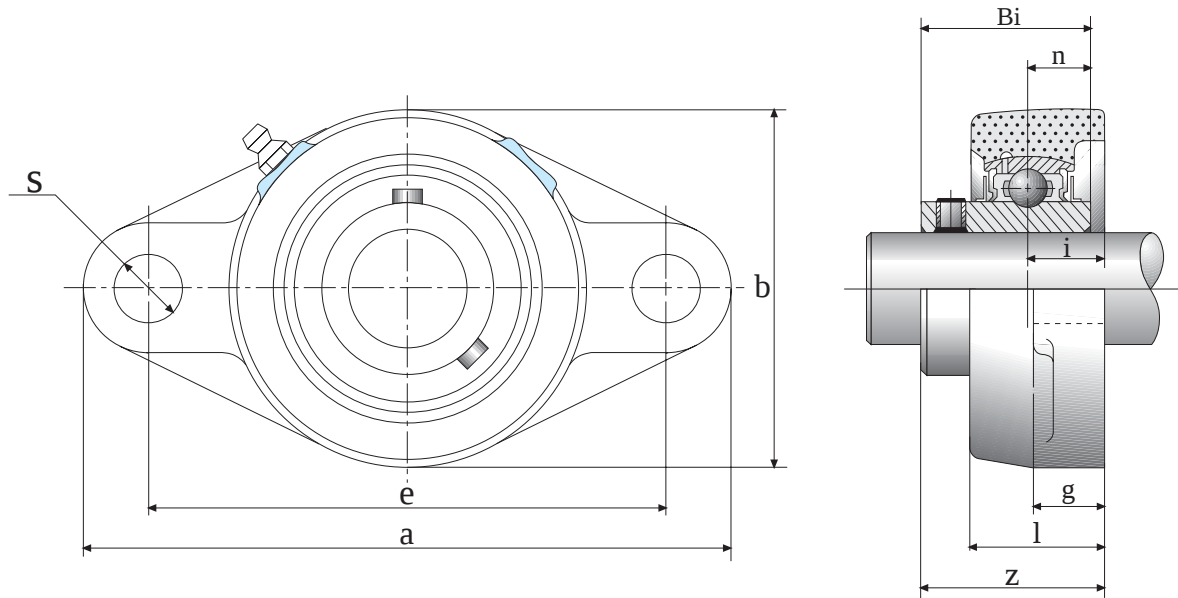

UNIT NUMBER	SHAFT DIAM.	DIMENSIONS (mm)										WEIGHT (kg)	BOLT SIZE	BEARING NUMBER	HOUSING NUMBER
	mm	a	e	i	g	l	s	b	z	Bi	n		mm		
UCFL201	12	113	90	15	12	25.5	12	60	33.3	31	12.7	0.50	M10	UC201	FL204
UCFL202	15	113	90	15	12	25.5	12	60	33.3	31	12.7	0.48	M10	UC202	FL204
UCFL203	17	113	90	15	12	25.5	12	60	33.3	31	12.7	0.47	M10	UC203	FL204
UCFL204	20	113	90	15	12	25.5	12	60	33.3	31	12.7	0.45	M10	UC204	FL204
UCFL205	25	130	99	16	14	27	16	68	35.7	34.1	14.3	0.63	M14	UC205	FL205
UCFL206	30	148	117	18	14	31	16	80	40.2	38.1	15.9	0.96	M14	UC206	FL206
UCFL207	35	161	130	19	16	34	16	90	44.4	42.9	17.5	1.2	M14	UC207	FL207
UCFL208	40	175	144	21	16	36	16	100	51.2	49.2	19	1.6	M14	UC208	FL208
UCFL209	45	188	148	22	18	38	19	108	52.2	49.2	19	1.9	M16	UC209	FL209
UCFL210	50	197	157	22	18	40	19	115	54.6	51.6	19	2.2	M16	UC210	FL210
UCFL211	55	224	184	25	20	43	19	130	58.4	55.6	22.2	3.2	M16	UC211	FL211
UCFL212	60	250	202	29	20	48	23	140	68.7	65.1	25.4	4.1	M20	UC212	FL212
UCFL213	65	258	210	30	24	50	23	155	69.7	65.1	25.4	5.1	M20	UC213	FL213
UCFL214	70	265	216	31	24	54	23	160	75.4	74.6	30.2	6.0	M20	UC214	FL214
UCFL215	75	275	225	34	24	56	23	165	78.5	77.8	33.3	6.5	M20	UC215	FL215
UCFL216	80	290	233	34	24	58	25	180	83.3	82.6	33.3	8.0	M22	UC216	FL216
UCFL217	85	305	248	36	26	63	25	190	87.6	85.7	34.1	9.5	M22	UC217	FL217
UCFL218	90	320	265	40	26	68	25	205	96.3	96	39.7	11.9	M22	UC218	FL218