



BEARINGS INSERT

Steel UC

Steel Eccentric UG

Steel UK

Special heat-treatment on bearing inner ring

Unique device to prevent bearing outer ring rotation

MATERIAL

Efficient sealing

The self-contained bearing is double sealed with a combination of heat-resistant oil-proof synthetic rubber seal and steel slinger

TECHNICAL DATA

Rational self-alignment

Larger load carrying capacity

Quiet operation

Longer service life

ANB Bearing Units with cast iron and rubber housings are all relubricable type equipped with grease fittings to secure full performance and longer service life of the units under any operating condition

Solid housing



The cast iron housing is of solid one-piece construction to provide maximum rigidity against deformation at mounting and wear resistance for any operating condition.

Easy and positive locking to shaft.

Complete interchangeability between bearing and housing.

Easy installation

The self-contained bearing is prelubricated with an adequate quantity of high quality grease

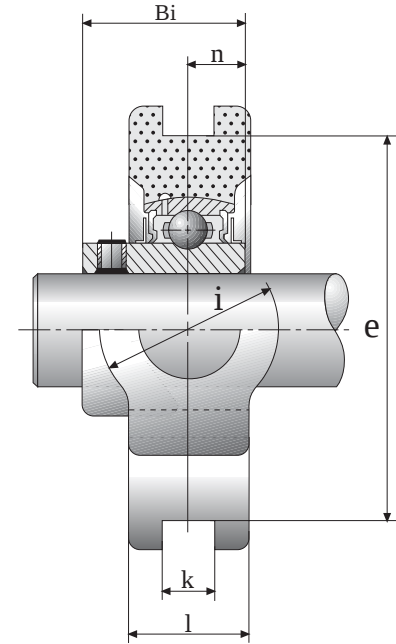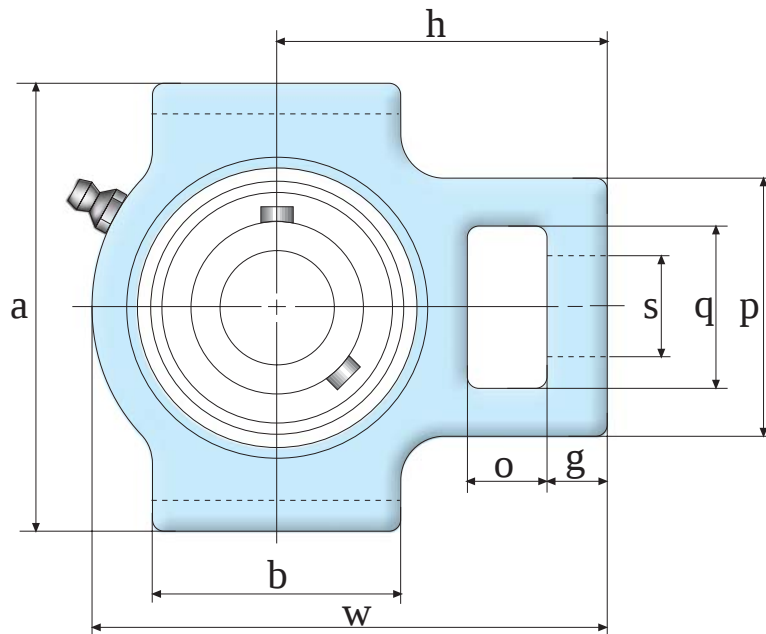

UNIT NUMBER	SHAFT DIAM.	DIMENSIONS (mm)															WEIGHT (kg)	BEARING NUMBER	HOUSING NUMBER
	mm	o	g	p	q	s	b	k	e	a	w	i	l	h	Bi	n			
UCT201	12	16	10	51	32	19	51	12	76	89	94	32	21	61	31	12.7	0.79	UC201	T204
UCT202	15	16	10	51	32	19	51	12	76	89	94	32	21	61	31	12.7	0.77	UC202	T204
UCT203	17	16	10	51	32	19	51	12	76	89	94	32	21	61	31	12.7	0.76	UC203	T204
UCT204	20	16	10	51	32	19	51	12	76	89	94	32	21	61	31	12.7	0.74	UC204	T204
UCT205	25	16	10	51	32	19	51	12	76	89	97	32	24	62	34.1	14.3	0.82	UC205	T205
UCT206	30	16	10	56	37	22	57	12	89	102	113	37	28	70	38.1	15.9	1.3	UC206	T206
UCT207	35	16	13	64	37	22	64	12	89	102	129	37	30	78	42.9	17.5	1.6	UC207	T207
UCT208	40	19	16	83	49	29	83	16	102	114	144	49	33	88	49.2	19	2.4	UC208	T208
UCT209	45	19	16	83	49	29	83	16	102	117	144	49	35	87	49.2	19	2.4	UC209	T209
UCT210	50	19	16	83	49	29	86	16	102	117	149	49	37	90	51.6	19	2.5	UC210	T210
UCT211	55	25	19	102	64	35	95	22	130	146	171	64	38	106	55.6	22.2	4.0	UC211	T211
UCT212	60	32	19	102	64	35	102	22	130	146	194	64	42	119	65.1	25.4	5.1	UC212	T212
UCT213	65	32	21	111	70	41	121	26	151	167	224	70	44	137	65.1	25.4	7.0	UC213	T213
UCT214	70	32	21	111	70	41	121	26	151	167	224	70	46	137	74.6	30.2	7.1	UC214	T214
UCT215	75	32	21	111	70	41	121	26	151	167	232	70	48	140	77.8	33.3	7.5	UC215	T215
UCT216	80	32	21	111	70	41	121	26	165	184	235	70	51	140	82.6	33.3	8.5	UC216	T216
UCT217	85	38	29	124	73	48	157	30	173	198	260	73	54	162	85.7	34.1	11.2	US217	T217