



UFL 000
UFL 000

SILVER



**Eccentric Lock
Screw Lock**

SIMPLE AND ACCURATE POSITIONING

Centerline marks provided on the housing offer simple and exact positioning, eliminating the need for adjustment after mounting.

For positioning, just scribe the lines on the supporting frame and match them with the centerline marks.

COMPACT AND LIGHTWEIGHT UNITS

This feature permits high performance, and allows for space and energy saving in your machine or equipment design.

QUICK AND EASY TO MOUNT

Eccentric locking collar or ensure fast and positive locking of the bearing to the shaft.

HIGH SEALING EFFICIENCY

Bearings are sealed, which protects against dust or humid conditions. Units can be easily fitted with stainless steel end-covers for additional protection.

HIGH-SPEED OPERATION

Compact bearing design is key to high-speed operation.

HIGH ANTI-CORROSIVENESS (STAINLESS SILVER SERIES)

Ideally suited for applications that come under adverse or extreme environmental conditions.


MARKETS SERVED

COMMERCIAL: Newspaper & Printing, Textile, Control Systems, Packing & Canning.

MANUFACTURING: Automotive & Motorcycle, Baking Equipment, Children's Toys, Circuits & Electronics, Cosmetics, Glass Product, Plastics, Stereo Equipment, Weather Stripping.

FOOD PROCESSING: Meat & Poultry, Cheese, Eggs, Mayonnaise, Ice Cream, Flour, Vegetables.

SILVER

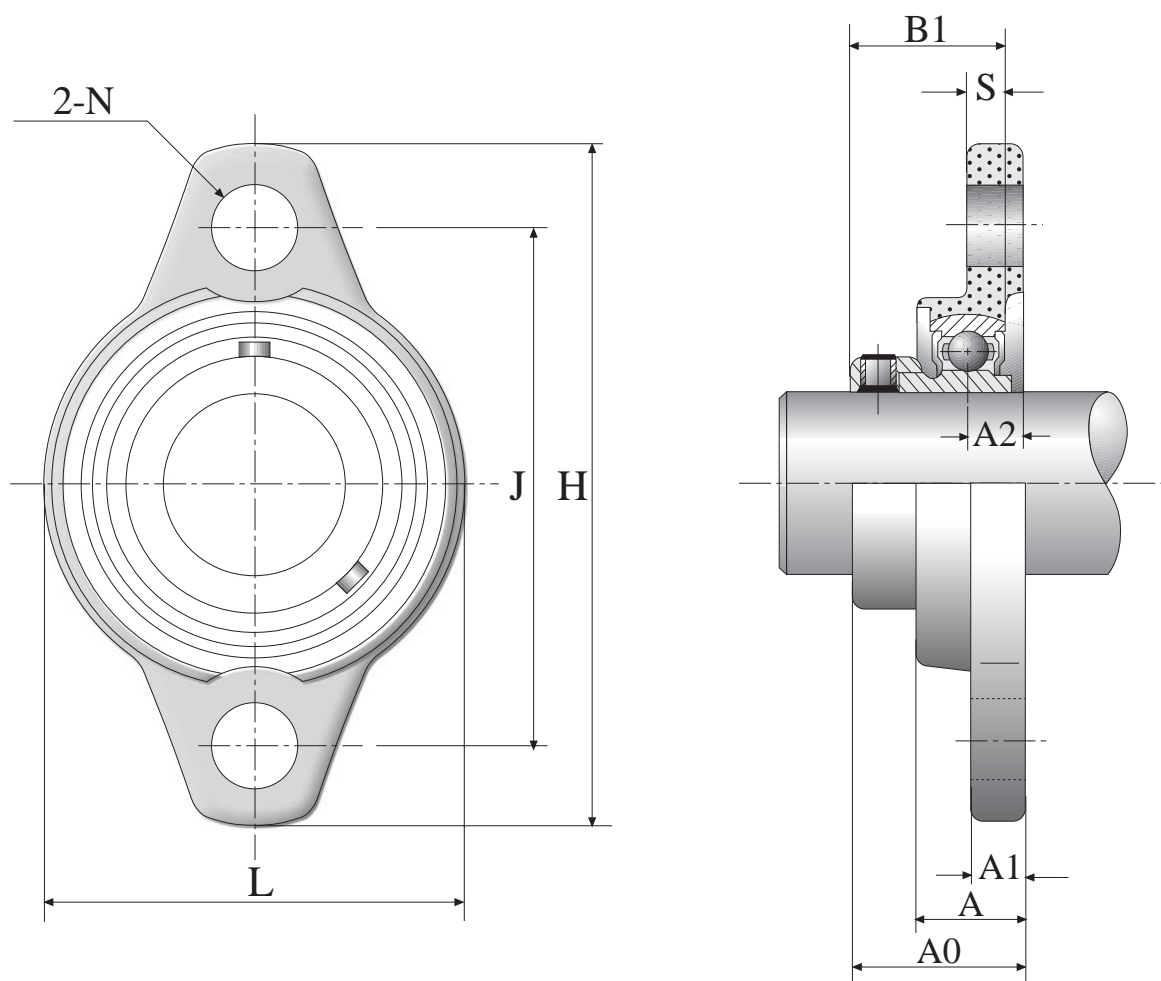

UNIT NUMBER	SHAFT DIAM.	DIMENSIONS (mm)										BOLT SIZE
	mm	H	J	A ₁	A ₂	A	N	L	A ₀	B ₁	S	mm
UFL08	8	48	37	4.5	4	8.5	4.8	27	16	15	3.5	M4
UFL000	10	60	45	5.5	5.5	11.5	7	36	19	17.5	4	M6
UFL001	12	63	48	5.5	5.5	11.5	7	38	19	17.5	4	M6
UFL002	15	67	53	6.5	6.5	13	7	42	20.5	18.5	4.5	M6
UFL003	17	71	56	7	7	14	7	46	22.5	20.5	5	M6
UFL004	20	90	71	8	8	16	10	55	26.5	24.5	6	M8
UFL005	25	95	75	8	8	16	10	60	27.5	25.5	6	M8
UFL006	30	112	85	9	9	18	13	70	29	26.5	6.5	M10
UFL007	35	122	95	10	10	20	13	80	32.5	29.5	7	M10