



MUCFPL 200
MUCFPL 200

STAINLESS STEEL BEARING INSERT

TECHNICAL DATA

No corrosion
FDA&FSDA approval
From 12 to 50 mm
Interchangeable with cast iron standards units
Maintenance free
Temperature work from - 35 to 102 degree
Tensile strength at break (ASTM 0630) is an impressive 17.300 PSI
Excellent mechanical strength' stiffness & dimension stability
Stainless Steel greasers and inserts
Solid base prevent dirt & bacteria
Reluable



OPTIONS

Close covers
Open covers (with Stainless Steel spring)
Back seals
Plastic covers for grease nipple
Color

BEARINGS INSERT

Stainless Steel type MUC
Stainless Steel type MB
Steel UC
Steel B
Steel Eccentric UG
Steel UK

MATERIAL



Housing

Exclusive PBT
Stainless Steel 304 inserts
Stainless Steel 304 greaser

Cover

Polypropylen
Stainless Steel ring

THERMOPLASTIC HOUSED SQUARE FLANGE

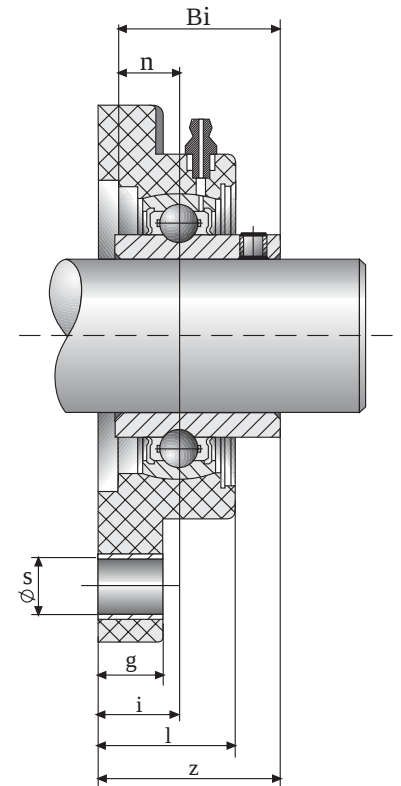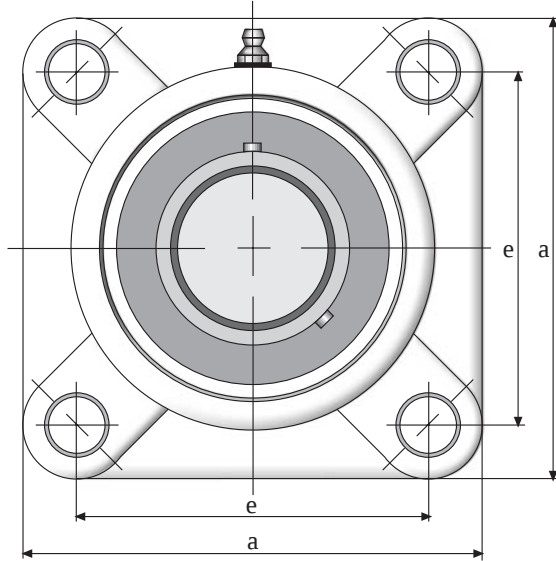

UNIT NUMBER	SHAFT DIAMETER		DIMENSIONS (mm)										WEIGHT (kg)	max. TORQUE		HOUSING NUMBER	BEARING NUMBER
	mm	inch	a	e	g	l	s	z	i	Bi	n	bolt d.		Nm			
MUCFPL201	12	1/2	87	63.5	13.4	27.8	11	36.3	18	31	12.7	0.32	M10	18	FPL204	MUC201	
MUCFPL202	15	9/16,5/8	87	63.5	13.4	27.8	11	36.3	18	31	12.7	0.31	M10	18	FPL204	MUC202	
MUCFPL203	17	11/16	87	63.5	13.4	27.8	11	36.3	18	31	12.7	0.30	M10	18	FPL204	MUC203	
MUCFPL204	20	3/4	87	63.5	13.4	27.8	11	36.3	18	31	12.7	0.29	M10	18	FPL204	MUC204	
MUCFPL205	25	13/16, 7/8, 15/16, 1	95	70	14.3	28	11	36.7	17	34	14.3	0.36	M10	25	FPL205	MUC205	
MUCFPL206	30	11/16, 11/8, 13/16, 11/4	107	83	14.3	31.5	11	41.4	19.2	38.1	15.9	0.50	M10	30	FPL206	MUC206	
MUCFPL207	35	11/4, 15/16, 13/8, 17/16	118	92	15.5	34.8	13	46.9	21.5	42.9	17.5	0.74	M12	35	FPL207	MUC207	
MUCFPL208	40	11/2, 19/16	130	102	17	37.5	14	53.2	23	49.2	19	0.97	M12	40	FPL208	MUC208	
MUCFPL209	45	15/8, 111/16, 13/4	137	105	19	41	17	54.2	24	49.2	19	1.10	M16	45	FPL209	MUC209	
MUCFPL210	50	113/16, 17/8, 115/16, 2	143	111	21	43	17	57.2	25	51.6	19	1.25	M16	50	FPL210	MUC210	

MODE OF LOAD	BREAKING POINT TEST						
	204	205	206	207	208	209	210
	15950	13000	18000	18500	19100	19350	19650
	10250	12150	17700	18500	19250	19350	19620
	3650	3350	3350	3520	3790	3850	3990