




25-400

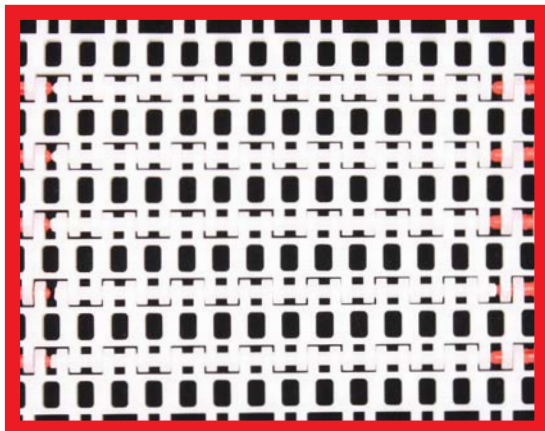

- Belt surface: Open belt with a smooth surface.
- Open area: 29%. Biggest opening 6 x 10 mm.
- Strength: Ideal for medium weight transportation.
- Material: PE, PP, POM.
- Colour: nat, white and grey, blue.
- Accessories: 25 and 50 mm flights.
25 and 50 mm sideguards.
- Application: Seafood, red meat, vegetables, bakery and food industry in general.
Even cooling/freezing and washing.

FRICTION MODULES

HUB SPECIFICATION


Hub width 40 mm	Number of teeth			
	6Z	8Z	12Z	20Z
Round bore (mm)	20ø	20ø 25ø	20ø 25ø 30ø 40ø	25ø 30ø 40ø
Hexagon bore (mm)	24x24x24			
Square bore (mm)	25x25 25x25 38.1x38.1 38.1x38.1 40x40 40x40 60x60			

BELT DATA

Materials	Max. belt pull kg/m of width	Belt weight kg/m ²
Polyethylene (PE)	630	5
Polypropylene (PP)	1060	5
Polyacetal (POM)	1500	7

SPROCKET DATA

No. of teeth Z	A=Outside diameter (mm)	B=Pitch diameter (mm)	C=Inside diameter (mm)
6	54	45	36
8	70	61	52
12	104	95	86
20	169	160	151

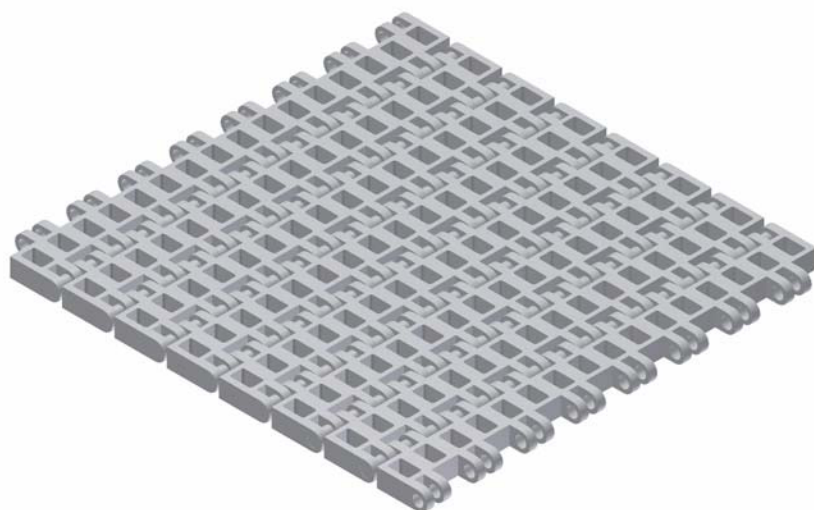

1:1

