


25-411

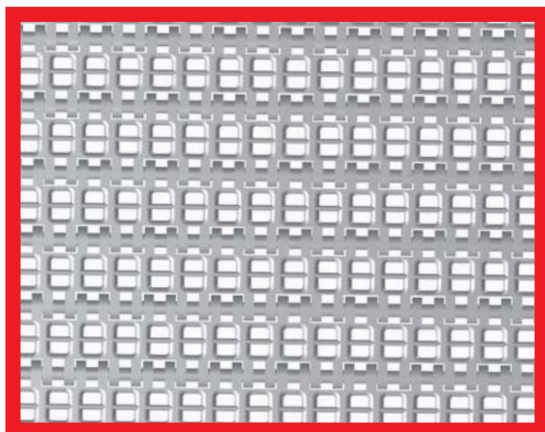

- Belt surface: Open Mesh.
- Open area: 26%. Biggest opening 3 x 6mm.
- Strength: Strongest belt in the 25 series.
Ideal for medium weight transportation.
- Material: PE, PP, POM.
- Colour: nat, white and grey, blue.
- Accessories: 25 and 50 mm flights.
25 and 50 mm side guards.
- Application: Transport of small products.

HUB SPECIFICATION

Hub width 40 mm	Number of teeth			
	6Z	8Z	12Z	20Z
Round bore (mm)	20ø	20ø	25ø	25ø
		25ø	30ø	30ø
			40ø	40ø
Hexagon bore (mm)	24x24x24			
Square bore (mm)		25x25	25x25	38.1x38.1
			38.1x38.1	40x40
			40x40	60x60



BELT DATA

Materials	Max. belt pull kg/m of width	Belt weight kg/m ²
Polyethylene (PE)	630	6
Polypropylene (PP)	1060	6
Polyacetal (POM)	1620	8.5

SPROCKET DATA

No. of teeth Z	A=Outside diameter (mm)	B=Pitch diameter (mm)	C=Inside diameter (mm)
6	54	45	36
8	70	61	52
12	104	95	86
20	169	160	151



1:1

