

25-830



- Belt surface: Structure top with 3 mm cones.
- Open area: Closed.
- Strength: An ideal choice for light transportation.
- Material: PE, PP, POM.
- Colour: Nat, white and grey, blue.
- Accessories: 25 and 50 mm flights.
25 and 50 mm side guards.
Modules can be supplied with a moulded indent of 40 mm.
- Application: Seafood, red meat, vegetables etc.

HUB SPECIFICATION

Hub width 40 mm	Number of teeth		
	6Z	12Z	20Z
Round bore (mm)	20ø	20ø	
		25ø	25ø
		30ø	30ø
		40ø	40ø
Square bore (mm)	40x40		40x40
			60x60



BELT DATA

Materials	Max. belt pull kg/m of width	Belt weight kg/m ²
Polyethylene (PE)	550	5.5
Polypropylene (PP)	650	5.5
Polyacetal (POM)	1050	8

SPROCKET DATA

No. of teeth Z	A=Outside diameter (mm)	B=Pitch diameter (mm)	C=Inside diameter (mm)
6	59	50	41
12	106	97	88
20	170	161	152

EASY TO CLEAN

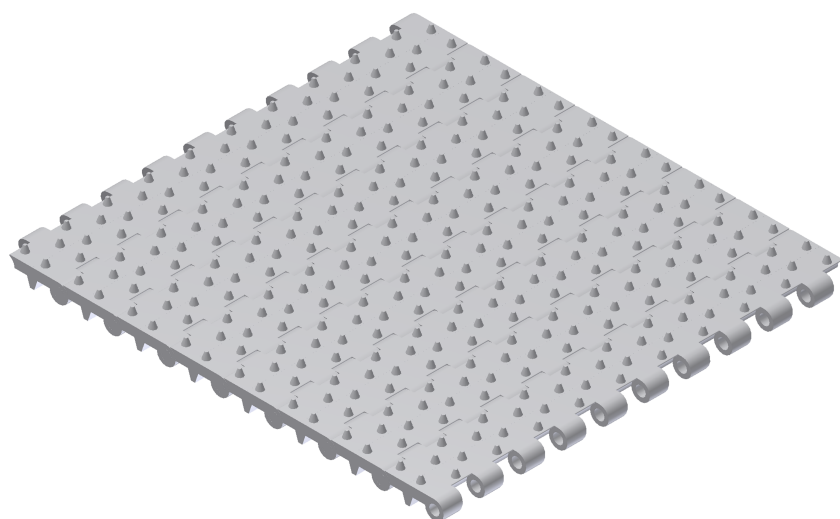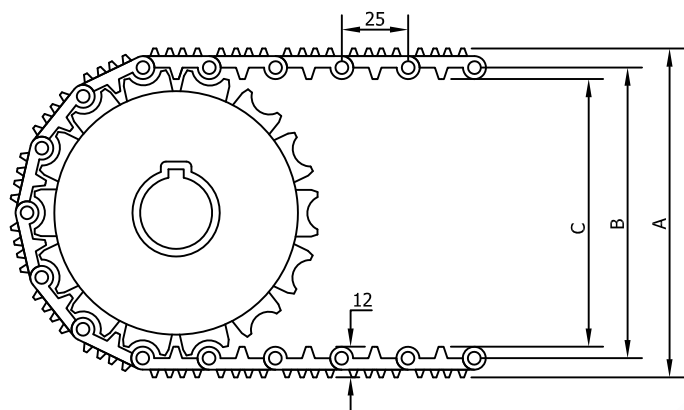

1:1