


50-100

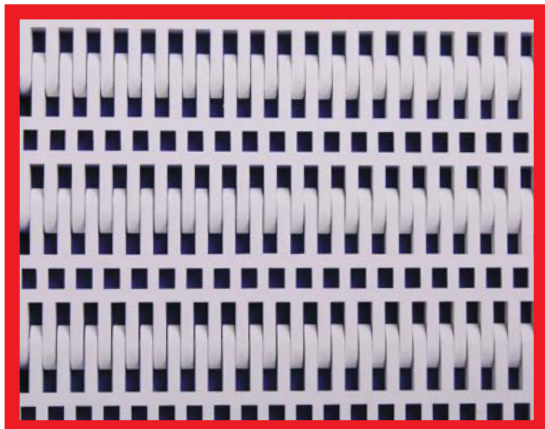

- ➔ **Belt surface:** Open belt with a smooth surface.
- ➔ **Open area:** 27%. Biggest opening 5 x 9 mm.
- ➔ **Strength:** The right belt for heavy applications.
- ➔ **Material:** PE, PP, POM.
- ➔ **Colour:** nat/white, grey/blue.
- ➔ **Accessories:** 25, 50, 75 and 100 mm flights.
Extended and bent flights.
50, 75, 100 and 150 mm side guards.
Hold-down.
- ➔ **Application:** Seafood, wood, bakery, meat, vegetables,
poultry and heavy duty transportation in general.

HUB SPECIFICATION


Hub width 40 mm	Number of teeth			
	6Z	8Z	10Z	12Z
Round bore (mm)	25ø	25ø		
	30ø	30ø	30ø	30ø
	40ø	40ø	40ø 50ø	40ø 50ø
Square bore (mm)	38.1x38.1 40x40	38.1x38.1 40x40	38.1x38.1 40x40	40x40 60x60

BELT DATA

Materials	Max. belt pull kg/m of width	Belt weight kg/m ²
Polyethylene (PE)	1840	8
Polypropylene (PP)	2795	8
Polyacetal (POM)	4200	12

SPROCKET DATA

No. of teeth Z	A=Outside diameter (mm)	B=Pitch diameter (mm)	C=Inside diameter (mm)
6	117	101	85
8	149	133	117
10	180	164	148
12	211	195	179

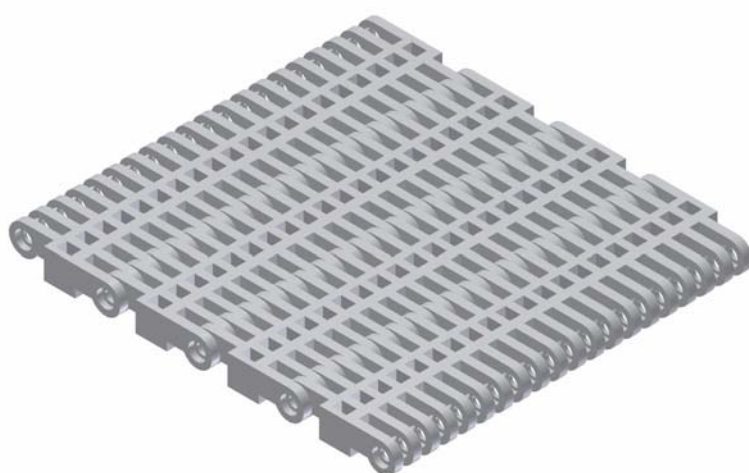

1:1

