


50-806

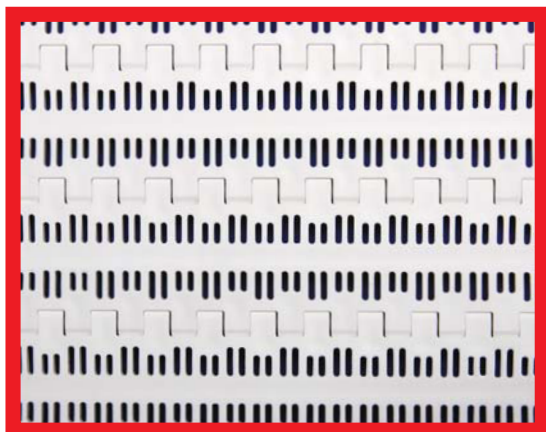

- Belt surface: Open belt with a smooth surface.
- Open area: 20%. Biggest opening 2.5\*11 mm.
- Strength: The right belt for medium-heavy transportation.
- Material: PE, PP, POM.
- Colour: nat, white, blue.
- Accessories: 3, 25, 50, 75 and 100 mm flights.  
70 and 150 mm supported flights.  
50, 75, 100 and 150 mm side guards.
- Application: Medium-heavy duty transportation, Dairy, Vegetables, poultry, snacks, sweet goods and other industries that handle products requiring drainage and small opening.

### HUB SPECIFICATION


Hub width 40 mm	Number of teeth			
	6Z	8Z	10Z	12Z
Round bore (mm)	25ø	25ø	25ø	30ø
	30ø	30ø	30ø 40ø	30ø 40ø
Square bore (mm)	38.1x38.1	38.1x38.1	38.1x38.1	38.1x38.1
	40x40	40x40	40x40 60x60	40x40 60x60

### BELT DATA

Materials	Max. belt pull kg/m of width	Belt weight kg/m <sup>2</sup>
Polyethylene (PE)	1200	8
Polypropylene (PP)	1400	8
Polyacetal (POM)	2100	12

### SPROCKET DATA

No. of teeth Z	A=Outside diameter (mm)	B=Pitch diameter (mm)	C=Inside diameter (mm)
6	115	101	85
8	147	133	117
10	178	164	148
12	209	195	179

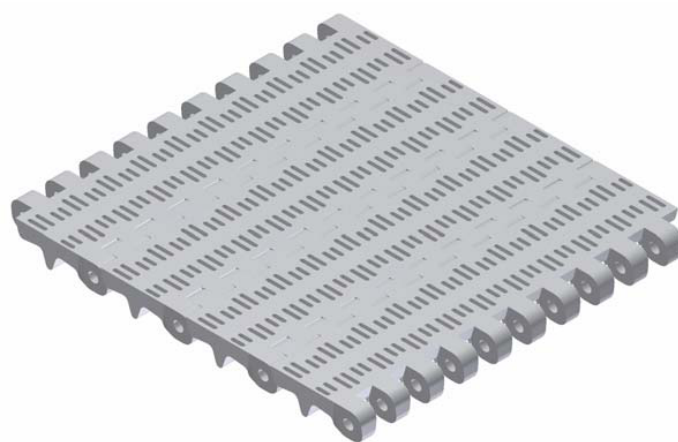

1:1

