


50-830

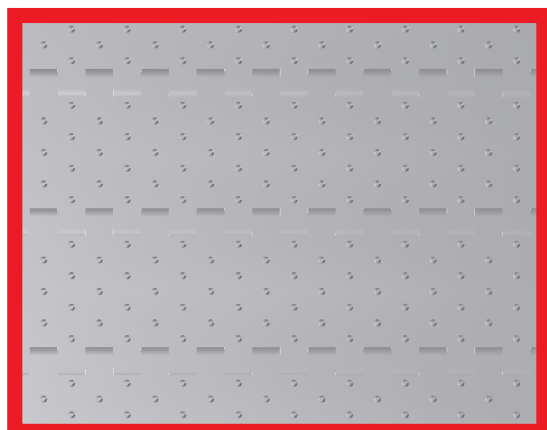

- Belt surface: Structure top with 3 mm cones.
- Open area: Closed.
- Strength: The right belt for medium-heavy transportation.
- Material: PE, PP, POM.
- Colour: nat/white, grey/blue.
- Accessories: 25, 50, 75 and 100 mm flights.
70 and 150 mm supported flights.
Scoop and bent flights.
50, 75, 100 and 150 mm side guards. Hold-down.
Flights fitted with a round top.
- Application: Seafood, red meat, vegetable etc.

HUB SPECIFICATION


Hub width 40 mm	Number of teeth			
	6Z	8Z	10Z	12Z
Round bore (mm)	20ø			
	25ø	25ø	25ø	25ø
	30ø	30ø	30ø	30ø
	40ø	40ø	40ø	40ø
				50ø 60ø
Square bore (mm)	25x25	25x25	25x25	25x25
	40x40	40x40	40x40 60x60	40x40 60x60

BELT DATA

Materials	Max. belt pull kg/m of width	Belt weight kg/m ²
Polyethylene (PE)	1200	8
Polypropylene (PP)	1400	8
Polyacetal (POM)	2060	12

SPROCKET DATA

No. of teeth Z	A=Outside diameter (mm)	B=Pitch diameter (mm)	C=Inside diameter (mm)
6	108	89	73
8	142	122	106
10	176	156	140
12	209	189	173

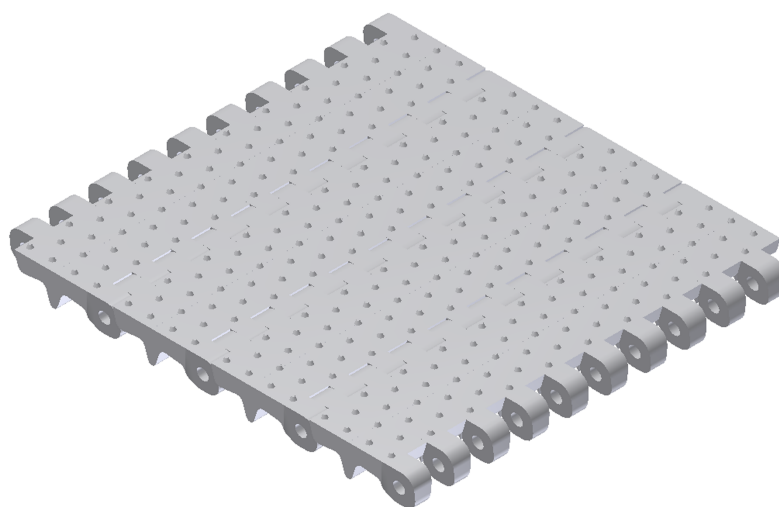

1:1

