


50-600

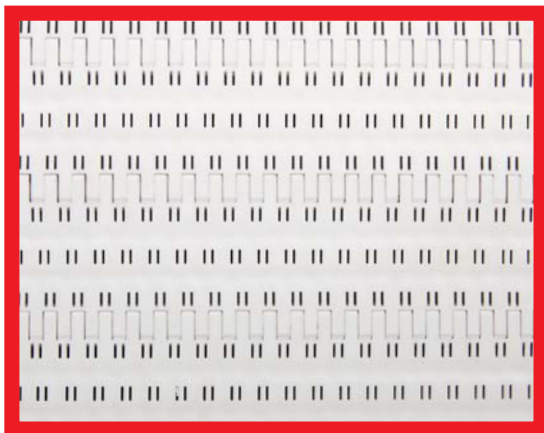

- ➔ Belt surface: Open mesh.
- ➔ Open area: 9%. Biggest opening 1 x 6 mm
- ➔ Strength: The right belt for medium-heavy transportation.
- ➔ Material/colour: PE, PP, POM.
- ➔ Colour: nat/white, grey/blue
- ➔ Accessories: 25, 50 and 75 mm flights.
50, 75, 100 and 150 mm side guards.
- ➔ Application: Dairy, vegetables, poultry, snacks, sweet goods
and other industries that handle products requiring
drainage and very small openings.

HUB SPECIFICATION


Hub width 40 mm	Number of teeth			
	6Z	8Z	10Z	12Z
Round bore (mm)	25ø	25ø		
	30ø	30ø	30ø	30ø
	40ø	40ø	40ø	40ø 50ø
Square bore (mm)	38.1x38.1 40x40	38.1x38.1 40x40	38.1x38.1 40x40 60x60	40x40 60x60

BELT DATA

Materials	Max. belt pull kg/m of width	Belt weight kg/m ²
Polyethylene (PE)	1790	7
Polypropylene (PP)	2400	7
Polyacetal (POM)	3600	11

SPROCKET DATA

No. of teeth Z	A=Outside diameter (mm)	B=Pitch diameter (mm)	C=Inside diameter (mm)
6	115	101	85
8	147	133	117
10	178	164	148
12	209	195	179

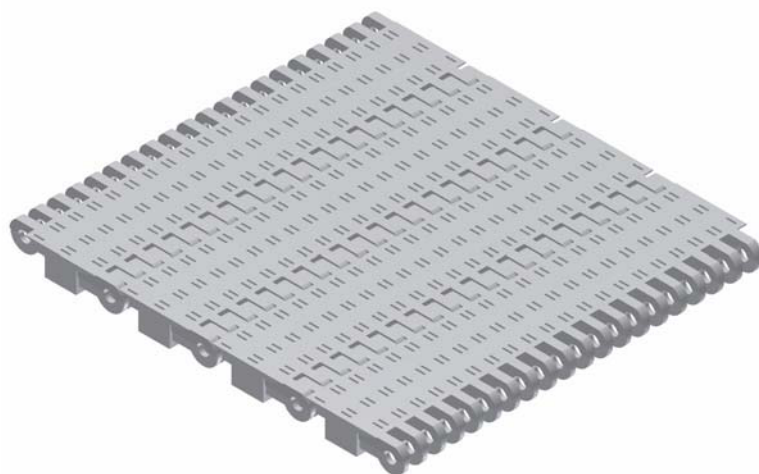

1:1

