





S-100

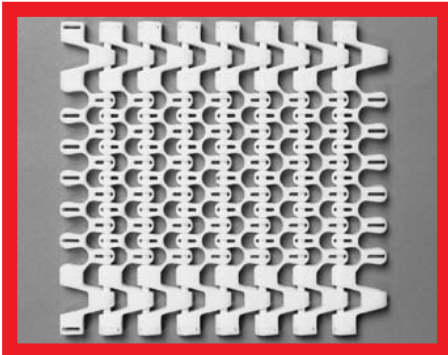

Belt surface:	Smooth.
Open area:	52 %
Strength:	The ideal choice for medium weight
Material/colour:	POM/PP
Accessories:	friction modules, hold-down and steel reinforcements. 25, 50, 75 mm flights, 25 mm side guards,
Application:	Spiral coolers, radius conveyors
Construction:	Side modules, centre modules.
Width interval:	Normal 20 mm. e.g. 209 mm, 229 mm. Inner radius Collapse factor from 1,5.

BELT DATA

Belt Material	Rods	Max. belt pull kg	Belt weight kg/m
Polyacetal (POM)	PP	75	7
	Nylon	110	7
	Steel	150	12
Polypropylene (PP)	PP	60	4.5
	Nylon	90	4.5
	Steel	100	9.7
Steel reinforcements	Steel	35	12

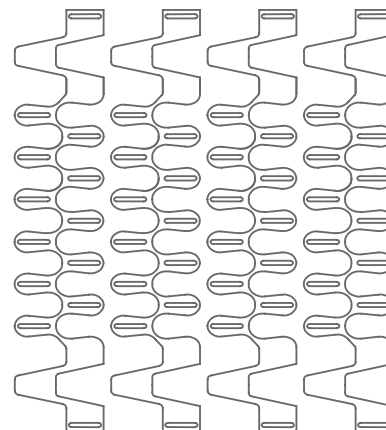

SPROCKET DATA

No. of teeth Z	A=Outside diameter (mm)	B=Pitch diameter (mm)	C=Inside diameter (mm)	Bore (mm)
8	78	66	54	ø20 - ø25 - 25x25 - 24x24x24hex
12	108	96	84	ø20 - ø25 - ø30 - ø40 - 25x25 - 40x40 - 1.5"x1.5"
20	173	161	149	ø25 - ø30 - ø40 - 25x25 - 40x40 - 1.5"x1.5"

