


GBSS-103

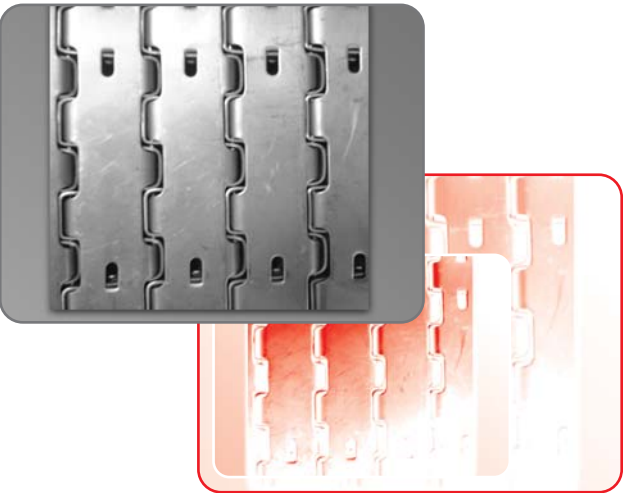

- Belt Surface: Perforated
Open Area: 10 %
Strength: Medium & heavy application
Material: Stainless steel 304/316
Cleanability: Good
Accessories: flights
Application: Packaging, fruit & vegetables, washing
Width interval: 33 mm

BELT DATA


Materials	Max. belt pull kg/m of width	Belt weight kg/m ²
Stainless steel	4000	13.5

SPROCKET DATA

No. of teeth Z	A=Outside diameter (mm)	B=Pitch diameter (mm)	C=Inside diameter (mm)
12	121.8	109.8	99.8
18	172.0	160.0	150

HUB SPECIFICATION

Hub width 16 mm	Number of teeth	
	12Z	18Z
Round bore (mm)	20	30
	25	35
	30	40
	35	45
	50	
	55	
	60	

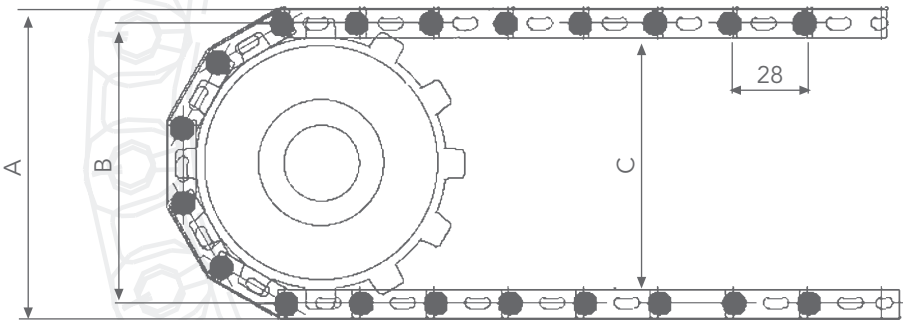

Standard
measure
of the belt

84
115
146
176
207
238
269
299
330
361
392
422
453
484
515
546
576
607
638
669
700
730
761
792
823
854
885
915
946
977
1008
1038
1069
1100
1130
1162
1192
1223
1251
1285
1316
1346
1377
1408
1439
1470
1500
1531
1562
1593
1624
1654
1685
1716
1747
1778
1808
1870
1900
1932
1962
1993
2024
2055
2086
2147
2178
2209
2240
2270
2301
2332
2363
2394
2424
2455
2486
2517