





Code	Pitch	Dimensions (mm)						Max. Load N	Kg/ Mtr
		Dr	W	d	H	A	B		
N381-P	1.5"	22	13	6	17.5	17.5	31	30000	1.9
N381	1.5"	15/88 17/78	21	8	22	39	42	48000	2.36
N414	1.63"	15/88	25	8	26	39	42	68000	2.57
N414-3	1.65"	19.05	23	8.7	26	43	46	68000	3.12
N419-4	1.65"	19.05	21	8.7	26	43	46	70000	3.72
N419-5	1.65"	19.05	21	8.7	26	43	46	72000	4.32
N508-4	2"	15.88	16.5	8	22	38.5	41.5	55000	2.46

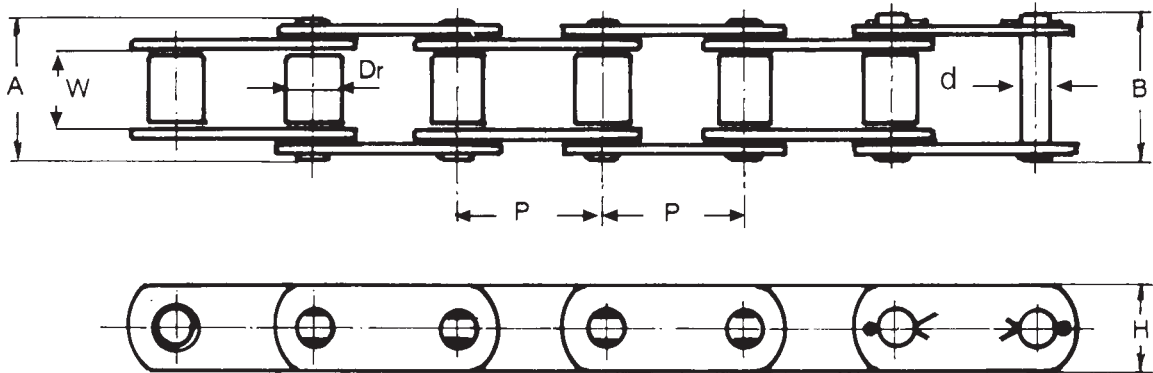


Agriculture chains

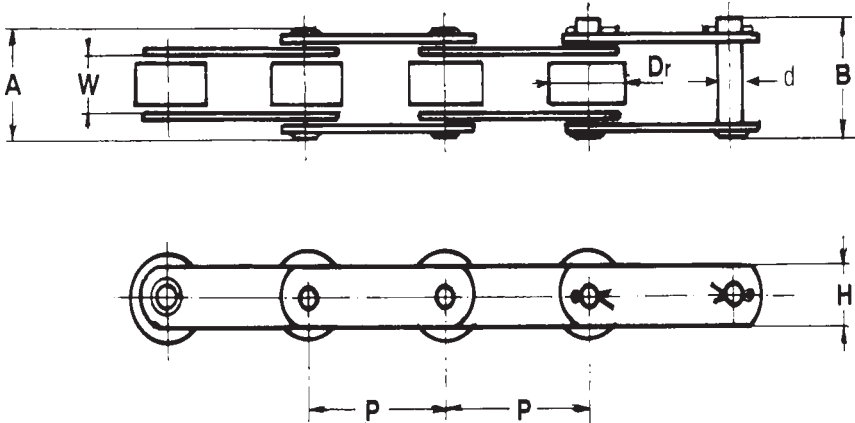


Steel Stainless Steel

Code	Pitch	Dimensions (mm)					Max. Load N
		Dr	W	H	A	B	
N381-D	1.5"	15.88	21.5	23	39	42	48000
N381-D-S	1.5"	15.88	21.5	23	39	42	30000
N4020-D	2"	31.75	15.5	26	37.5	40.5	40000
N4020-D-S	2"	31.75	15.5	26	37.5	40.5	28000

S type and C type steel agricultural chains

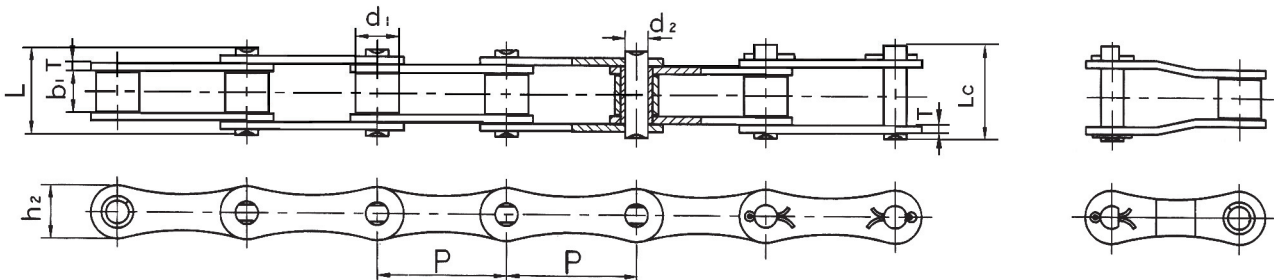

Chain No.	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length		Inner plate depth	Plate thick-ness	Ultimate tensile strength	Average tensile strength	Weight per meter
	P	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	h ₂ max	T max	Q min	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kN	kg/m
S32	29.21	11.43	15.88	4.45	26.7	28.8	13.2	1.8	8.0/1818	21.6	0.86
S42	34.93	14.27	19.05	7.00	34.3	37.0	19.8	2.8	27.0/6136	50.8	1.60
S45	41.40	15.24	22.23	5.72	37.7	40.4	17.3	2.8	18.0/4091	36.1	1.66
S52	38.10	15.24	22.23	5.72	37.7	40.4	17.3	2.8	18.0/4091	36.1	1.68
S55	41.40	17.78	22.23	5.72	37.7	40.4	17.3	2.8	18.0/4091	36.1	1.80
S55R	41.40	17.78	22.23	8.90	41.0	44.0	22.4	3.5	45.0/10227	73.1	2.49
S55RH	41.40	17.78	22.23	8.90	43.2	46.4	22.4	4.0	65.0/14772	84.5	2.74
S62	41.91	19.05	26.20	5.72	40.3	43.0	17.3	2.5	26.7/6067	36.1	1.87
S77	58.34	18.26	22.23	8.90	43.2	46.4	26.2	4.0	45.0/10227	73.1	2.65
S88	66.27	22.86	28.58	8.90	49.8	53.0	26.2	4.0	45.0/10227	73.1	3.25
CA650	50.80	25.00	27.80	9.53	40.4	44.7	25.0	4.0	80.0/18182	95.5	3.49
A557	41.40	17.78	20.24	8.00	37.4	40.6	23.1	3.1	55.6/12636	74.3	2.64

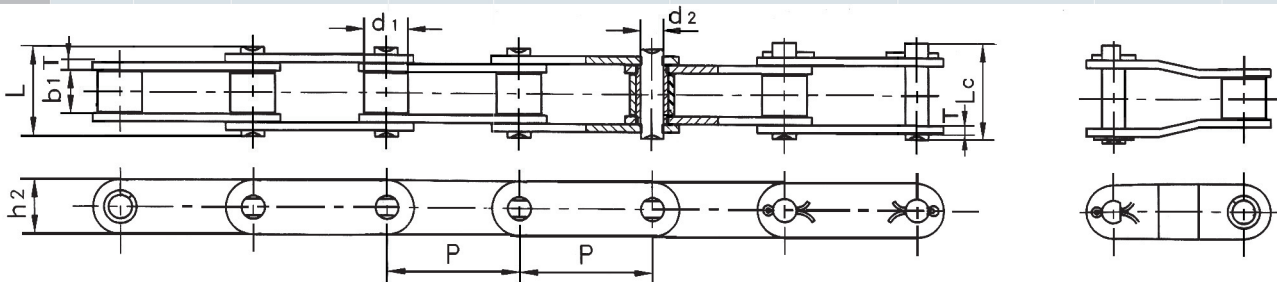

Chain No.	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length		Inner plate depth	Plate thick-ness	Ultimate tensile strength	Average tensile strength	Weight per meter
	P	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	h ₂ max	T max	Q min	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kN	kg/m
CA550	41.40	16.87	19.81	7.19	35.00	38.00	19.30	2.80	39.10/8886	51.2	1.94
CA550V	41.40	16.80	19.05	8.28	36.10	39.10	22.00	3.00	55.00/12499	68.7	2.24
CA555	41.40	16.87	12.70	7.19	29.70	33.10	19.30	3.10	39.10/8886	56.0	1.83
CA557	41.40	17.78	20.24	8.00	37.40	40.60	23.10	3.10	55.61/12639	74.3	2.20
CA620	42.01	17.91	24.51	7.19	41.80	45.20	20.20	3.25	39.10/8886	55.1	2.35
CA2060H	38.10	11.91	12.70	5.94	29.74	31.72	17.45	3.25	31.28/7109	40.5	1.50
CA2063H	38.10	11.89	12.70	5.94	29.40	34.20	19.30	3.25	31.28/7109	40.5	1.65
38.4R	38.40	15.88	19.05	6.92	33.80	36.40	17.30	2.50	33.00/7480	41.2	1.70
38.4V	38.40	15.88	18.00	6.92	33.80	36.40	17.30	3.00	40.00/9091	50.0	1.83
38.4VB	38.40	15.88	19.05	8.28	36.10	39.40	20.50	3.00	50.00/11363	62.5	2.17
S62F3	41.91	19.05	25.40	8.00	42.00	44.60	26.00	3.00	47.00/10796	58.7	3.12