








Double pitch conveyor
chain attachments

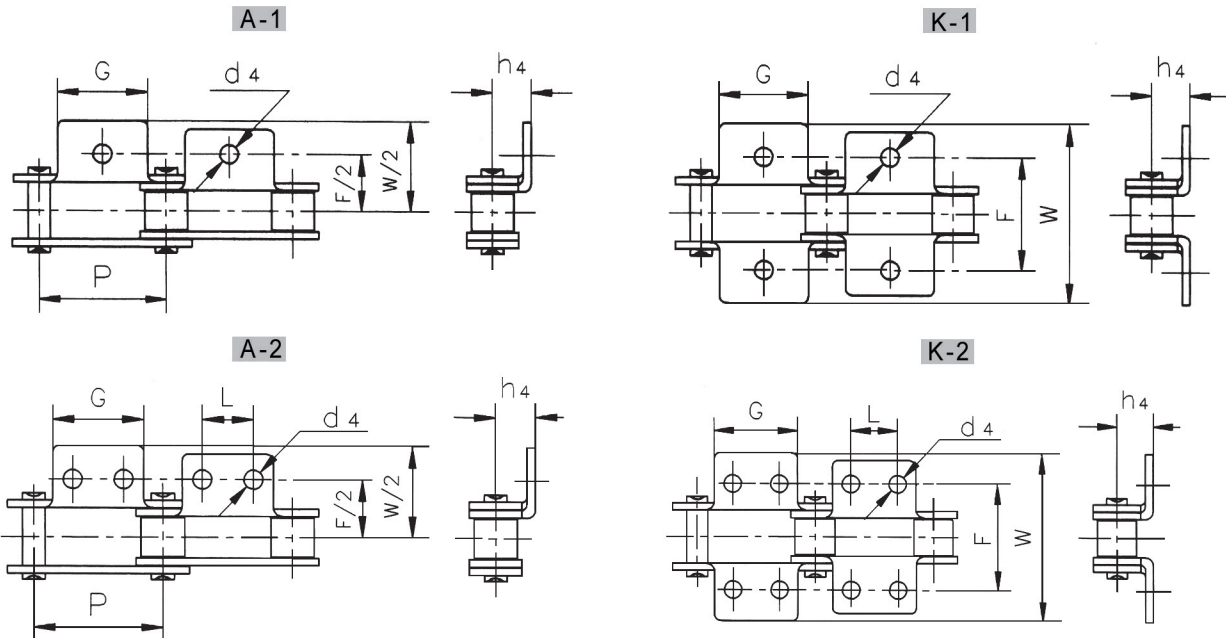

DIN/ISO Chain No.	ANSI Chain No.	P	G	L	F	W	h ₄	d ₄
		mm	mm	mm	mm	mm	mm	mm
C208A C208AL	C2040 C2042	25.4	19.1	9.5	25.4	39.6	9.1	3.4
C208B C208BL		25.4	23.2	12.7	25.4	39.6	9.1	4.5
C210A C210AL	C2050 C2052	31.75	23.8	11.9	31.8	49.0	11.1	5.5
C212A C212AL	C2060 C2062	38.1	28.6	14.3	42.9	67.8	14.7	5.5
C212AH C212AHL	C2060H C2062H	38.1	28.6	14.3	42.9	67.8	14.7	5.5
C216A C216AL	C2080 C2082	50.8	38.1	19.1	55.6	87.8	19.1	6.8
C216AH C216AHL	C2080H C2082H	50.8	38.1	19.1	55.6	87.8	19.1	6.8
C220A C220AL	C2100 C2102	63.5	47.6	23.8	66.6	107.5	23.4	9.2
C220AH C220AHL	C2100H C2102H	63.5	47.6	23.8	66.6	107.5	23.4	9.2
C224A C224AL	C2120 C2122	76.2	57.2	28.6	79.3	121.4	27.8	11.0
C224AH C224AHL	C2120H C2122H	76.2	57.2	28.6	79.3	121.4	27.8	11.0
C232A C232AL	C2160 C2162	101.6	76.2	38.1	104.7	151.6	36.5	13.1
C232AH C232AHL	C2160H C2162H	101.6	76.2	38.1	104.7	151.6	36.5	13.1


Double pitch conveyor chain attachments

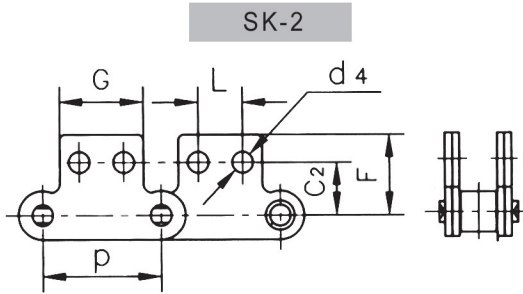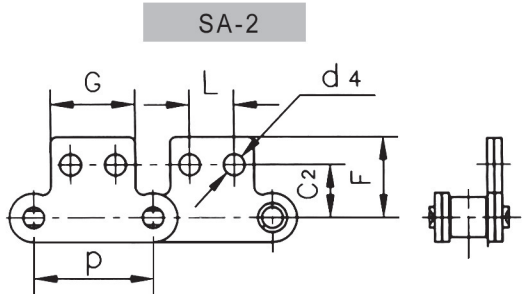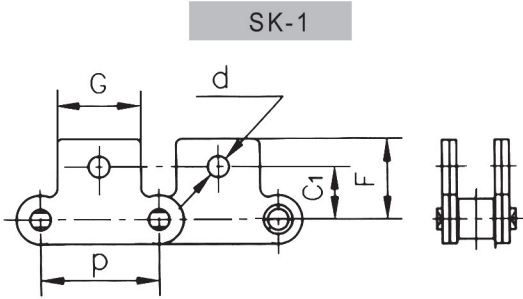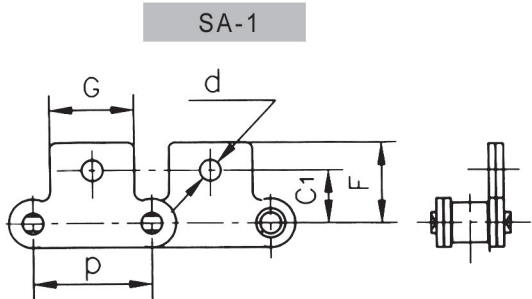


DIN/ISO Chain No.	ANSI Chain No.	P	G	L	C ₁	C ₂	F	d ₄	d ₅
		mm	mm	mm	mm	mm	mm	mm	mm
C208A C208AL	C2040 C2042	25.40	19.1	9.5	11.1	13.5	20.5	3.4	5.5
C208B C208BL		25.40	23.2	12.7	11.1	13.5	20.5	4.5	5.5
C210A C210AL	C2050 C2052	31.75	23.8	11.9	14.3	15.9	25.0	5.5	6.6
C212A C212AL	C2060 C2062	38.10	28.6	14.3	17.5	19.1	32.9	5.5	9.2
C212AH C212AHL	C2060H C2062H	38.10	28.6	14.3	17.5	19.1	32.9	5.5	9.2
C216A C216AL	C2080 C2082	50.80	38.1	19.1	22.2	25.4	43.5	6.6	11.0
C216AH C216AHL	C2080H C2082H	50.80	38.1	19.1	22.2	25.4	43.5	6.6	11.0
C220A C220AL	C2100 C2102	63.50	47.6	23.8	28.6	31.8	50.4	8.4	13.0
C220AH C220AHL	C2100H C2102H	63.50	47.6	23.8	28.6	31.8	50.4	8.4	13.0



Conveyor chain with
special attachments




Chain No.	P	h	H	h4	G	d4
	mm	mm	mm	mm	mm	mm
C2042HF1	25.40	15.0	25.0	6.0	37.4	7.0

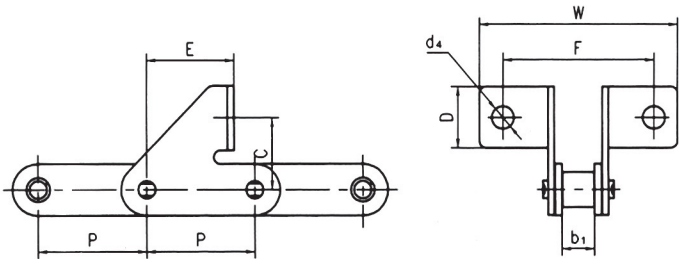


Chain No.	P	b1	F	W	C	D	E	d4
	mm	mm	mm	mm	mm	mm	mm	mm
C2050SD	31.75	9.4	45.0	59.0	212.0	18.0	25.7	6.6


C2052A1F1



C2062HA1F4




Chain No.	P	A	B	C	h	H	h2	h3	h4	d4
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
C2052A1F1	31.75	15.3	17.8	11.5	14.7	22.6	15.0	9.3	12.7	6.5
C2062HA1F4	38.10	20.0			13.0	23.0	18.0	13.3	9.0	6.8

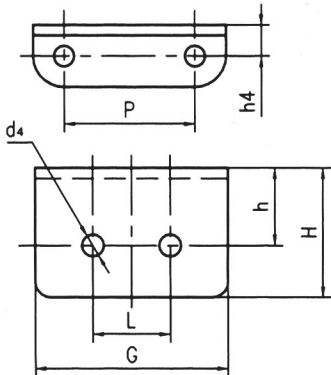

Chain No.	P	h	H	h4	G	L	d4
	mm	mm	mm	mm	mm	mm	mm
C2082HF1A2	50.8	17.7	29.7	18.0	74.8	30.0	8.5


Attachment For Conveyor Chains

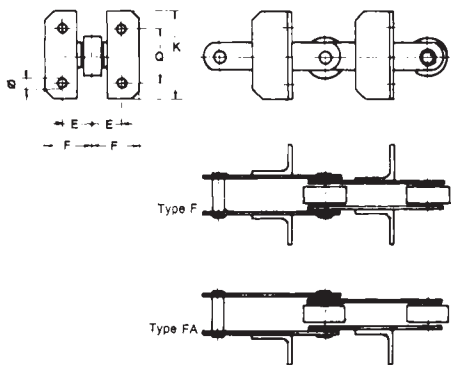


Steel

Stainless Steel


Code	Pitch	Dimensions (mm)				
		Q	K	Q	E	F
N40	3"	32	65	10	40	57
N80	3"	57	85	10	39	54
N95	4"	65	100	10	56.5	54
N95W	4"	65	100	10	39.5	57

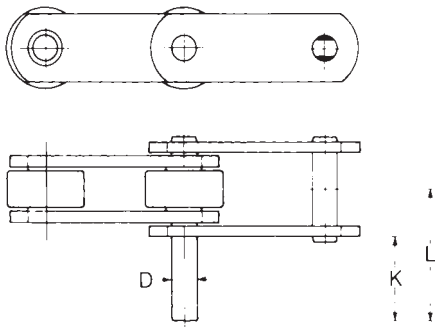

Code	Dimensions (mm)		
	L	K	D
N40	56	40	12.7
N80	58	40	12.7
N95	58	40	12.7
N95w	62	40	12.7

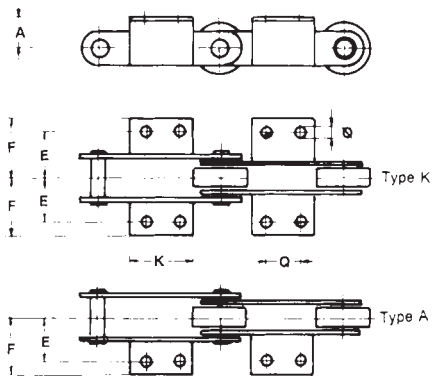


Code	Pitch	Dimensions (mm)					
		A	E	Q	F	Q	K
N40	2"	17	33	10	47	41	75
N80	2"	24	40	10	51	20	45
N80	2"	32	46.5	10	58.5	32	60
N95	3"	32	43	10	61	31	64
N95W	3"	32	48.5	10	64	31	55
N160	100/4"	38	60	10	77	30	60
N160	100/4"	38	62	14	77	34	60

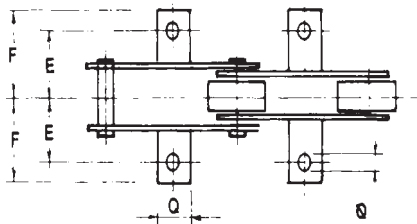

Code	Pitch	Dimensions (mm)				
		E	Q	Q	F	A
N40	2"	17	28	10	30	19
N40	3"	38	25	10	51	19
N40	50mm	35	60	10	50	16
N80	3"	40	25	10	51	24
	4"					
N95	4"	45	30	10	69.5	32
	6"					




Conveyor chain with attachments

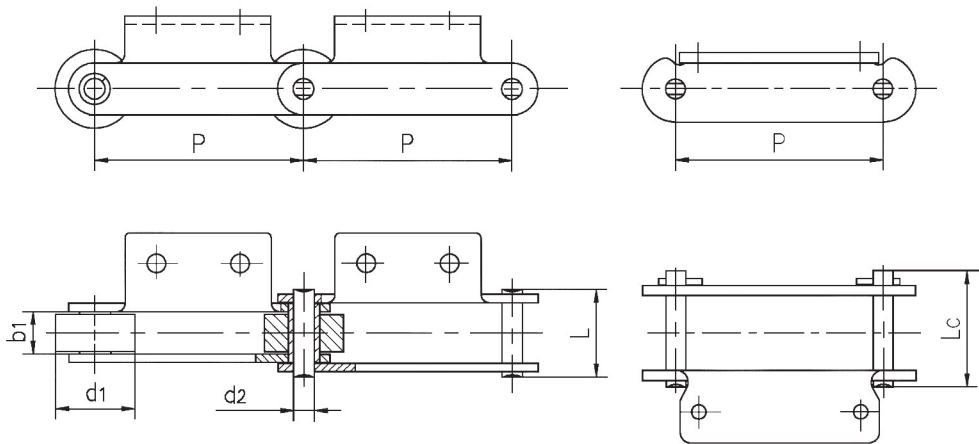

Chain No.	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length		Ultimate tensile strength	Average tensile strength	Weight per meter
	P	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	Q min	Q ₀ max	q
	mm	mm	mm	mm	mm	mm	kN/LB	kN	kg/m
M56F1-P-100	100	38.0	20.5	10.00	42.3	46.1	56.0/12726	66.0	4.63
M56F2-P-100	100	42.0	22.5	10.00	44.6	48.5	56.0/12726	66.0	5.67
M75-P100	100	38.0	18.9	9.53	40.4	44.7	75.0/17043	88.5	4.85
M75-P100F1	100	38.0	18.9	9.53	38.4	42.7	72.0/16362	84.9	4.01
P100F1	100	42.0	23.0	9.53	52.0	54.3	86.7/19702	102.3	6.06
P100F2	100	36.0	18.0	9.53	47.0	49.3	86.7/19702	102.3	4.60
P100F3	100	29.0	30.0	14.50	71.0		95.0/21588	112.1	9.46
P100F4	100	40.0	22.0	11.30	53.5		65.0/14771	76.7	5.13
P150F2	150	40.0	27.0	11.10	39.4	61.0	124.6/28315	147.0	5.39
M315K2F1-P-250	250	50.0	47.0	25.00	98.9	105.0	315.0/71584	371.7	20.60
P300	300	80.0	45.0	23.81	95.5	103.0	300.0/68175	354.0	24.32


Conveyor chain with attachments

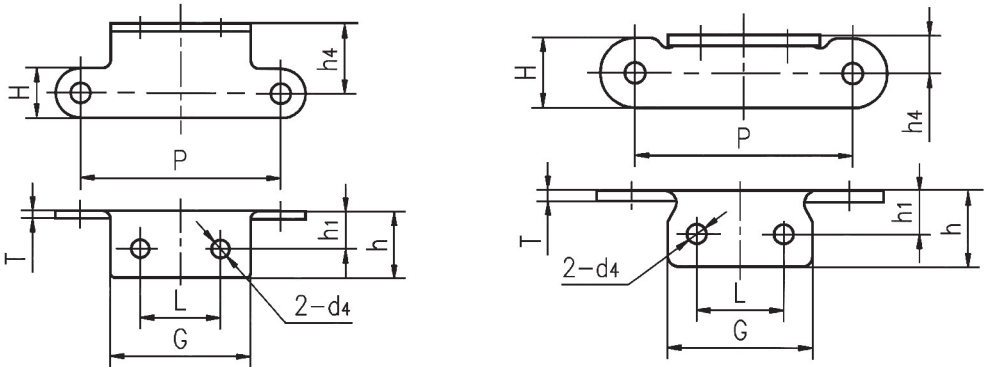

Chain No.	P	L	G	h ₁	h	h ₄	H	d ₄	T
	mm	mm	mm	mm	mm	mm	mm	mm	mm
M56F1-P-100	100	40.0	70.0	19.13	33.67	35.0	25.0	9.0	4.0
M56F2-P-100	100	29.7	50.0	46.20	58.2	21.5	32.0	7.0	4.0
M75-P100	100	40.0	70.0	18.30	42.3	24.9	26.0	9.0	4.0
M75-P100F1	100	40.0	70.0	18.80	42.8	24.4	26.0	9.0	3.5
P100F1	100	78.0	96.0	19.75	35.0	17.5	32.0	7.0	5.0
P100F2	100	40.0	70.0	19.75	35.0	17.5	32.0	9.0	5.0
P100F3	100	40.0	70.0	27.90	41.9	28.0	38.1	12.0	6.0
P100F4	100	40.0	65.0	18.65	30.65	22.0	32.0	10.0	4.5
P150F2	150	60.0	85.0	25.95	38.60	22.5	32.0	10.0	6.0
M315K2F1-P-250	250	60.0	100.0	28.75	48.75	57.0	82.0	14.0	10.0
P300	300	200.0	250.0	41.48	61.48	105.0	60.0	13.0	10.0




Conveyor chain with attachments

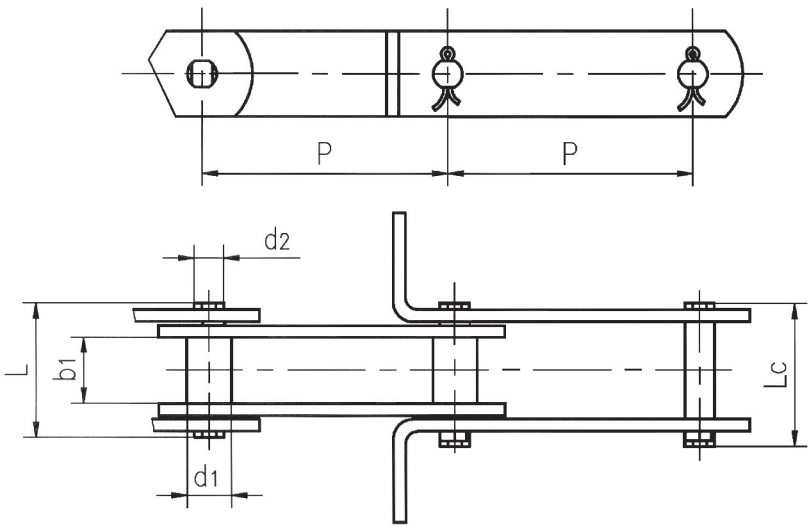

Chain No.	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length		Ultimate tensile strength	Average tensile strength	Weight per meter
	P	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	Q _{min}	Q ₀	q
	mm	mm	mm	mm	mm	mm	kN/LB	kN	kg/m
M80-P100F1	100	18.0	28.0	12.0	55.0	58.5	80.0/181818	94.4	5.19
M310F1-P-125	125	40.0	52.0	20.0	103.4	109.4	303.0/688636	357.5	24.88
M310-P-125	125	40.0	52.0	20.0	103.4	109.4	303.0/688636	357.5	19.88


Chain No.	P	L	h	h ₄	H	T
	mm	mm	mm	mm	mm	mm
M80-P100F1	100	145.5	70.10	25.0	35.0	5.0
M310F1-P-125	125	195.0	243.18	35.0	55.0	10.0
M310-P-125	125	195.0	98.18	35.0	55.0	10.0






Double pitch stainless steel
conveyor chain attachments


A-1

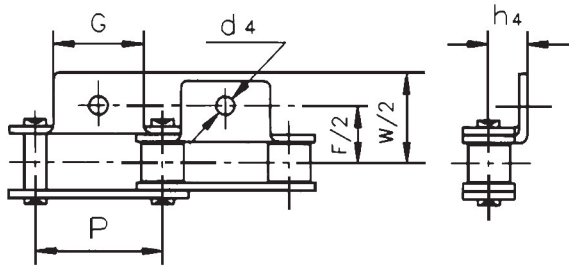


K-1

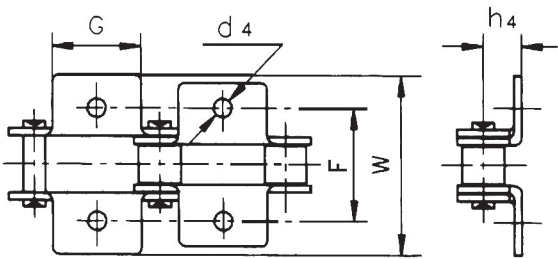

A-2

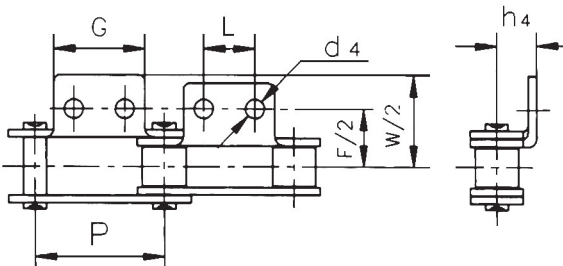


K-2

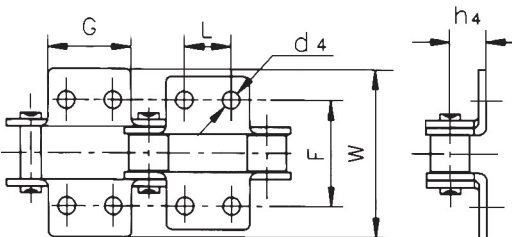


Chain No.	P	G	L	F	W	h ₄	d ₄
	mm	mm	mm	mm	mm	mm	mm
C2040SS C2042SS	25.4	19.1	9.5	25.4	39.6	9.1	3.4
C208BSS C208BLSS	25.4	23.2	12.7	25.4	39.6	9.1	4.5
C2050SS C2052SS	31.75	23.8	11.9	31.8	49.0	11.1	5.5
C2060SS C2062SS	38.1	28.6	14.3	42.9	67.8	14.7	5.5
C2060HSS C2062HSS	38.1	28.6	14.3	42.9	67.8	14.7	5.5
C2080SS C2082SS	50.8	38.1	19.1	55.6	87.8	19.1	6.8
C2080HSS C2082HSS	50.8	38.1	19.1	55.6	87.8	19.1	6.8
C2100SS C2102SS	63.5	47.6	23.8	66.6	107.5	23.4	9.2
C2100HSS C2102HSS	63.5	47.6	23.8	66.6	107.5	23.4	9.2


Sharp top chains

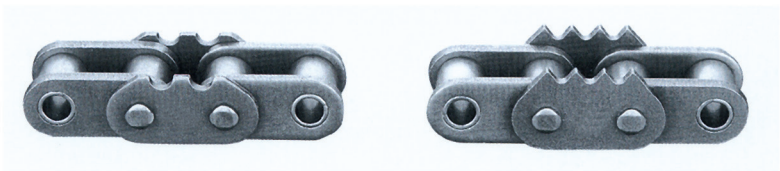


C16BF2




C16BF3




16B-1170

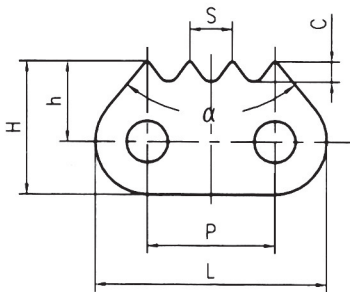

16B-1180




Chain No.	P	L	h	H	C	S	α	β
	mm	mm	mm	mm	mm	mm		
C16BF2	25.4	—	18.7	29.2	2.8	12.7	90°	68°
C16BF3	25.4	—	18.7	29.2	4.7	6.35	90°	68°
16B-1170	25.4	46.1	16.0	26.5	4.0	8.47	79.2°	
16B-1180	25.4	46.0	12.2	22.5	3.5	12.0	110	




Chain No.	P	L	h	H	C	S	α
	mm	mm	mm	mm	mm	mm	
16B-1185	25.4	46.0	16.0	26.5	4.0	8.0	75°




Sharp top chains



Chain No.	P	L	h	H	C	S
	mm	mm	mm	mm	mm	mm
20AF1	31.75	57.2	14.75	35.84	6.34	23.11




Chain No.	P	h	H	C	S	α
	mm	mm	mm	mm	mm	
20B-1350	31.75	19.8	33.0	6.6	31.75	78°




Chain No.	P	L	h	H	C	S
	mm	mm	mm	mm	mm	mm
120-1802	38.1	73.1	21.0	38.5	4.0	12.7


24B-1805



24B-1807





24B-1809




Chain No.	P	L	h	H	C	S	α
	mm	mm	mm	mm	mm	mm	
24B-1805	38.1	73.1	21.0	38.5	—	50.8	72.2°
24B-1807	38.1	73.1	25.5	43.0	—	11.0	90°
24B-1809	38.1	73.1	21.0	38.5	4.0	12.7	

Heavy-duty cranked-link transmission chains

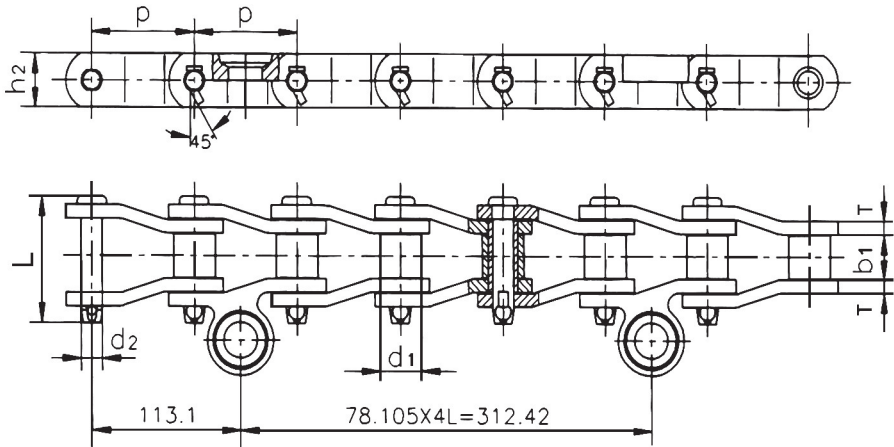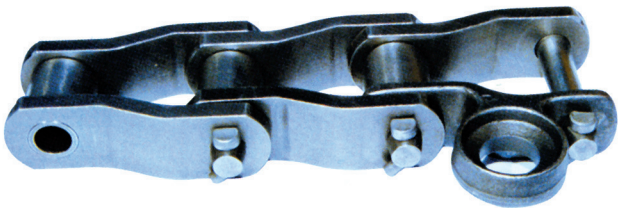

Chain No.	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length	Plate depth	Plate thickness	Ultimate tensile strength	Average tensile strength
	P	d1 max	b1 min	d2 max	L max	h2 max	T max	Q min	Q0
	mm	mm	mm	mm	mm	mm	mm	kN/LB	kN
SS40SL	78.105	31.78	31.75	15.90	89.15	38.0	9.5	250.0/56818	266.88

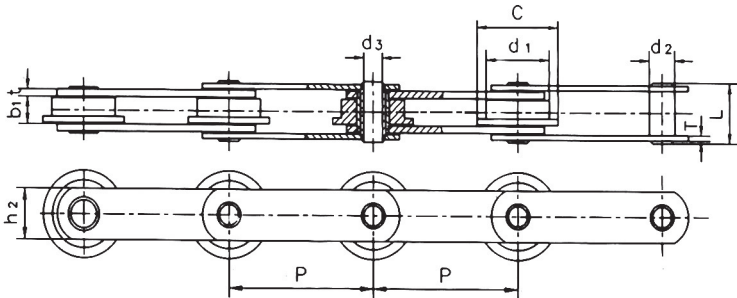

Steel chains for sewage disposal

Chain No.	Pitch	Width between inner plates	Roller dimensions		Pin diameter		Pin length	Plate depth	Plate dimensions		Ultimate tensile strength	Average tensile strength	Weight per meter
	P	b1 min	d1 max	C max	d2 max	d3 mon	L max	h2 max	T max	t max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kN	kg/m
W152	152.4	25.40	66.7	85.7	27.1	20.0	58.8	50.0	5.0	7.0	110.0/25000	122.1	10.50