


SS815

Chain No.	Width mm	T mm		D mm		Working load KN (max)	
		GB	ISO	GB	ISO	304	430/2Cr13
SS815-K205	53	3	3.15	6	6.35	3.8	2.6
SS815-K250	63.5						
SS815-K263	66.8						
SS815-K300	76.2						
SS815-K325	82.6						
SS815-K350	88.9						
SS815-K400	101.6						
SS815-K450	114.3						
SS815-K500	127						
SS815-K600	152.4						
SS815-K750	190.5						

Material: Stainless Steel 301

Pitch: 38.1 mm

Standard Length: 10 ft (3.048m)

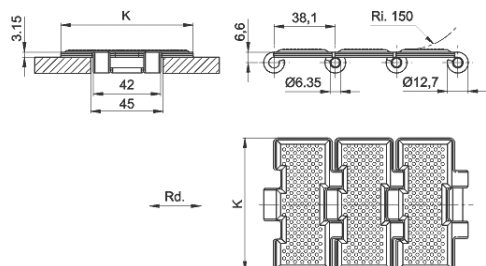



SSC815 G325 (RUBBER)

Chain No.	Width W mm	T mm		D mm		Working load KN (max) 430/2Cr13
		GB	ISO	GB	ISO	
SSC815-G325	82.6	3	3.15	6	6.35	

Material: Stainless Steel 301

Pitch: 38.1 mm

Standard Length: 10 ft (3.048m)

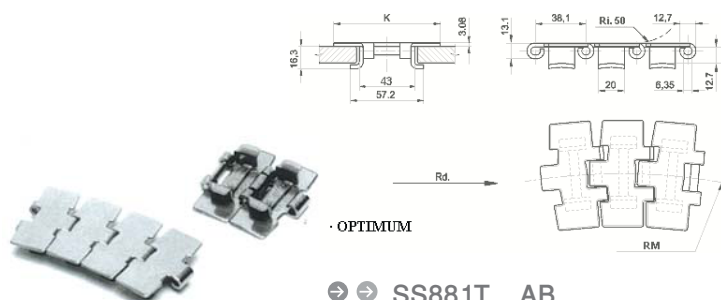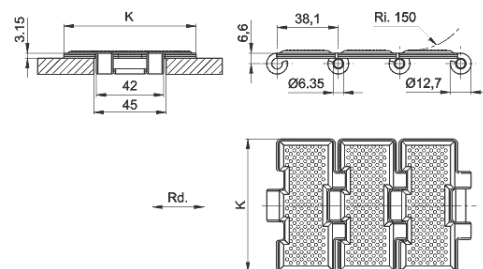

SS881T AB

Chain No.	Width mm	Radius R MIN	T mm		D mm		Working load KN (max)	Working load KN (max)	
			GB	ISO	GB	ISO		304	430/2Cr13
SS881T AB-K325	82.6	460	3	3.15	6	6.35	3.5	44.2	46
SS881T AB-K450	114.3	500							
SS881T AB-K600	152.4	500							
SS881T AB-K750	190.5	500							

Material: Stainless Steel 301

Pitch: 38.1 mm

Standard Length: 10 ft (3.048m)