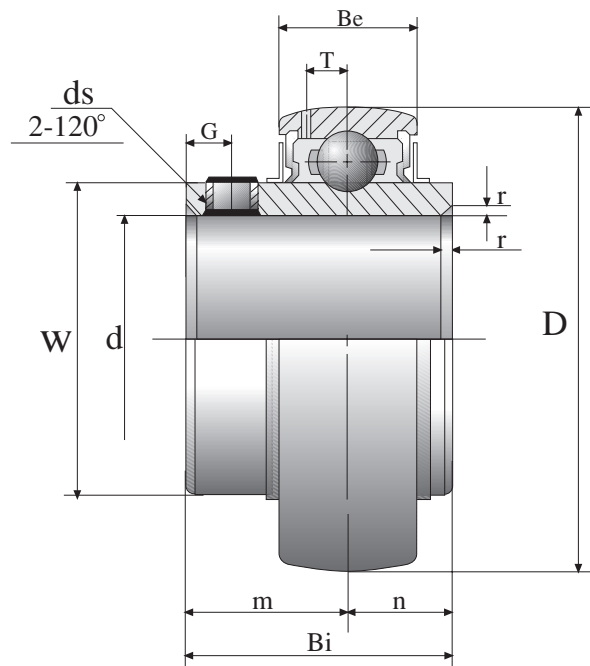


**MATERIAL****UNIT MUC200**

Ring & Balls	SUS440C
Slinger & Retainer	SUS304
Seal	Nitril rubber (NBR)
Set screw	SUS304

UNIT NUMBER	SHAFT DIAM.	DIMENSIONS (mm)										WEIGHT (kg)	BASIC LOAD RATING (N)	
	mm	D	Bi	Be	r	n	m	G	ds	T	W		DYNAMIC Cr	STATIC Cor
MUC201	12	47	31	17	1.5	12.7	18.3	4.5	M6X0.75	4.2	29	0.21	10900	5300
MUCW201	12	40	25	12	1.5	12.7	9.6	4	M6X0.75	4.2	24.8	0.19	10900	5300
MUC202	15	47	31	17	1.5	12.7	18.3	4.5	M6X0.75	4.2	29	0.19	10900	5300
MUCW202	15	40	25	12	1.5	12.7	9.6	4	M6X0.75	4.2	24.8	0.19	10900	5300
MUC203	17	47	31	17	1.5	12.7	18.3	4.5	M6X0.75	4.2	29	0.18	10900	5300
MUCW203	17	40	25	12	1.5	12.7	9.6	4	M6X0.75	4.2	24.8	0.18	10900	5300
MUC204	20	47	31	17	1.5	12.7	18.3	5	M6X1	4.2	29	0.15	10900	5300
MUC205	25	52	34.1	17	1.5	14.3	19.8	5	M6X1	4.2	34	0.19	11900	6300
MUC206	30	62	38.1	19	1.5	15.9	22.2	5	M6X1	5.2	40.5	0.31	16700	9050
MUC207	35	72	42.9	20	2	17.5	25.4	6.5	M8X1	5.6	48	0.48	22000	12300
MUC208	40	80	49.2	21	2	19	30.2	8	M8X1	6.2	53	0.62	24900	14300
MUC209	45	85	49.2	22	2	19	30.2	8	M8X1	6.4	57.4	0.67	28100	16400
MUC210	50	90	51.6	24	2	19	32.6	10	M10X1.25	6.6	61.8	0.78	30200	18600